

The Flexfiller Direct G4 is the latest in pumpless digital pressurisation technology for light commercial and residential buildings. It's a slim, wall-mounted pumpless top-up pressurisation unit, with a top-up flow rate of up to 14 l/min depending on the mains or boosted mains, water pressure. It is designed to be connected directly to a building's incoming water supply using the included flexible hose. It is there to fill and maintain the pressure of a heating or chilled water system without the need for a pump.

The unit comes with a user-friendly controller that displays all operating and error conditions comprehensibly and conveniently. It features extensive data storage for online and offline analysis, microprocessor control, and self-learning algorithms with a graphical display. It comes with MODBUS RTU and BACnet communication protocols as standard and has its key operating parameters password protected.

#### Product features

- Silent, pumpless pressurisation unit.
- Fills system from empty.
- For system volumes up to 15,000 litres.
- Fluid Protection Category 4 backflow prevention.
- Onscreen service reminder (12 months).
- Colours: Grey (RAL7016) and Red (RAL3002).
- Password protected.
- Pressure setting in 0.1 bar increments.
- Flood protection (Runtime limiter and excessive activation logging).
- Volt free contact: Common alarm (N/C or N/O), fully programmable for specific alarms customisable via control unit).
- Extensive data storage for online or offline analysis.
- Advanced technology ensures the lowest power consumption, long service life and easy maintenance.
- Microprocessor control, self-learning with graphical display.
- Max. flow rate of 14 l/min.
- Connects directly to the mains (boosted) water mains, via included flexible hose (L = 400 mm).

You can register here for warranty [Click here](#)

#### Advantages

- Universal connection to drain fits 22 mm copper compression, 32 mm PP push fit and 32 mm PP solvent weld discharge pipe to BS 5254 or BS EN1451.
- The user-friendly control unit displays all operating and error conditions in an logical and convenient way.
- Four status LED indicators.
- System safety valve monitoring.
- Expansion vessel health monitoring.
- Leak detection.
- Usage monitor, logs and counters.
- MODBUS RTU and BACnet Communication Protocol via RS485.
- Can be combined with Flamconnect Remote (Please check with your local sales office for availability).
- Two 40 cm flexible hoses (for mains and sealed system connection) included for easy installation.



## Technical Specifications

### Maximum operating conditions

- System temperature range at point of connection: 5 °C / 90 °C.
- Ambient temperature range: 5 °C / 45 °C.
- Max. system pressure: 10.0 bar.
- Min. / max. delivery pressure: 0.5 - 6.0 bar.
- Pressure rating: PN 10.
- Protection class: IP44.
- Relative humidity 95% non-condensing.

### Certifications and Standards Applied


- PED 2014/68/EU Sound Engineering Practice.
- IEE - Electrical Safety Guidance.
- EMC 2004/108/EC.
- BS 7074 Parts 1 to 3.
- Machinery Directive 2006/42/EC, UK Supply of Machinery (Safety) Regulations 2008.
- Electronic Components have been tested and comply with the EMC Directives, UK EMC Regulations 2016.
- EN 61000-6-2: Generic Standards – Immunity standard for industrial environments.
- EN 61000-6-3: Generic Standards – Emission standard for residential, commercial and light industrial environment.
- Low Voltage Directive 2014/35, Electrical Equipment (Safety) Regulations 2016.
- CE marked components, where applicable.
- WRAS approved check valve.
- IP44 (BS EN60529) rated controller.

### Materials of construction

- Cabinet: Mild steel CR4 Powder Coated
- Drain manifold: PA66 GF30
- Check-valves: POM
- Filter: POM
- Connections:
  - In -and outlet manifold: DZR Brass
  - Tundish: PA66 GF30
- Pipework: Stainless steel braided Flexible hose / EPDM / Copper
- Finish: Powder coated
- Valves: Brass / PTFE

Description	Flexfiller Direct G4	
Order Code	20100	
GTIN	08712874201002	
Model	<u>Flexfiller Direct G4</u>	
Connections	System [mm]	15 (compression)
	Mains Supply [mm]	15 (compression)
	Drain (Tundish) *	3/4" BSP
Standby Power Consumption [W]	2	
Full Load Current [A]	0.3	
Weight [kg]	4	


\* 22 mm copper compression, 32 mm PP push fit and 32 mm PP solvent weld.

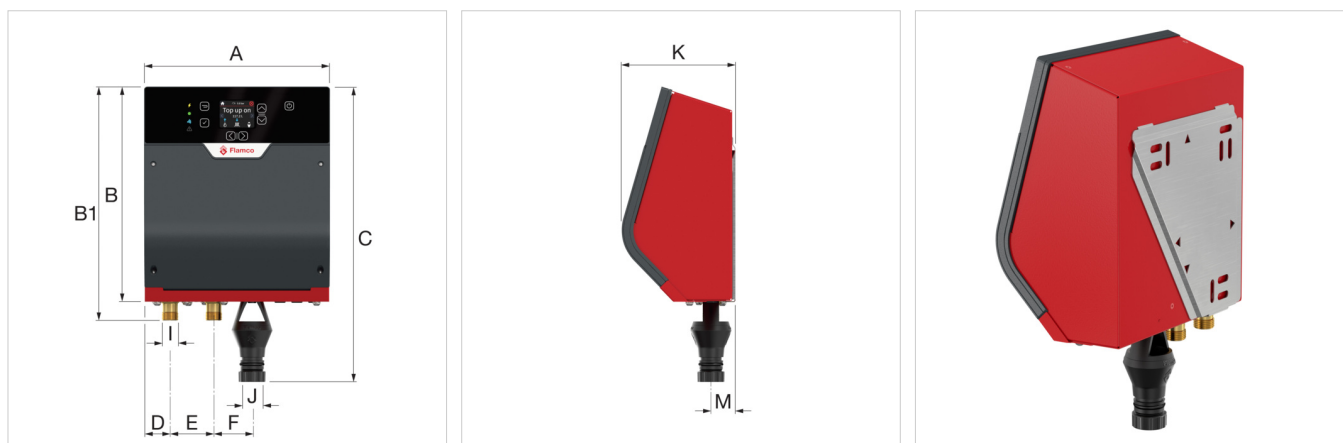

### Dimensions Flexfiller Direct G4

Type	Dimensions										
	A [mm]	B [mm]	B1 [mm]	C [mm]	D [mm]	E [mm]	F [mm]	I ["]	J [mm]	K [mm]	M [mm]
Flexfiller Direct G4	225	262	284	359	32	53	46	1/2" BSP	22 / 32 *	141	30

\* 22 mm copper compression, 32 mm PP push fit and 32 mm PP solvent weld.

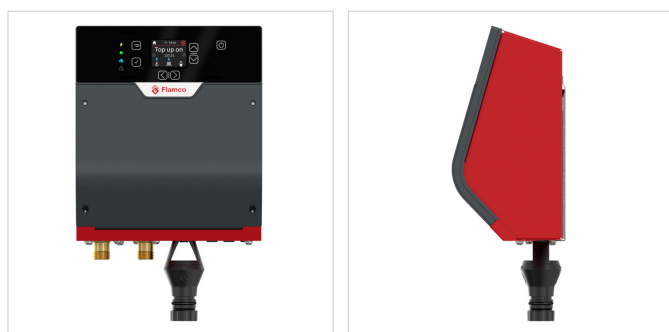

**Classification General Data**

<b>Etim Group</b>	Pressure increase/decrease
<b>Etim Class</b>	Central heating refill installation
<b>Product Name</b>	Flexfiller Direct G4
<b>Brand</b>	FLAMCO
<b>Product Type</b>	Top Up Units
<b>Artikelnummer</b>	20100
<b>GTIN</b>	08712874201002

**Attributes**

<b>Suitable for membrane pressure expansion tank</b>	Yes
<b>Suitable for compressor-controlled automatic expansion unit</b>	Yes
<b>Connections</b>	Internal thread cylindrical BSPP-G (ISO 228-1)
<b>Nominal diameter</b>	1/2 inch (15)
<b>Outer pipe diameter 1 supply</b>	15 Millimetre
<b>Outer pipe diameter 1 return</b>	15 Millimetre
<b>With filter</b>	Yes
<b>With de-aerator</b>	Yes
<b>Pressure</b>	0.5 - 6 bar
<b>Max. operating pressure</b>	10 Bar
<b>With drain funnel</b>	Yes
<b>With automatic filling function</b>	Yes
<b>Connection size of filling pipe</b>	15 Millimetre
<b>Filling capacity</b>	840 Litre per hour
<b>Height</b>	359 Millimetre
<b>Barrier</b>	Entry and exit
<b>Width</b>	225 Millimetre
<b>Category of system separator</b>	Other
<b>Depth</b>	141 Millimetre
<b>With pressure reducer</b>	No
<b>Suitable for softening</b>	No
<b>With system separator</b>	Yes
<b>Max. temperature at the inlet</b>	45 Degrees celsius
<b>Max. temperature at the outlet</b>	90 Degrees celsius
<b>Suitable for full demineralization</b>	No
<b>Suitable for pH value stabilization</b>	No
<b>With pressure gauge</b>	Yes
<b>Suitable for fixed installation</b>	Yes
<b>Suitable for mobile use</b>	No
<b>With insulation</b>	No

**Find more information online:**

[Quick start guide](#)  
[Installation and operating instruction](#)  
[Flextronic Connectivity Guide](#)  
[Kiwa certificate K13471/08](#)  
[WRAS certificate](#)  
[Statement of compliance](#)  
[Flexfiller Direct G4 DWG](#)  
[Flexfiller Direct G4 DXF](#)  
[Flexfiller Direct G4 IPT](#)  
[Flexfiller Direct G4 RFA](#)  
[Flexfiller Direct G4 STEP](#)  
[Brochure](#)  
[Spare parts](#)

Washway Lane  
UK-WA10 6PB, St Helens, Merseyside - gb

T +44 17 447 447 44  
E [uk.info@aalberts-hfc.com](mailto:uk.info@aalberts-hfc.com)  
I [flamcogroup.com/uk-en](http://flamcogroup.com/uk-en)